BODENCOUTURE™

SolidCORE®

Innovative design flooring with integrated sound insulation

SolidCORE®

...the latest generation of design flooring.

The innvovative premium design floor is made with a rigid coreboard. Latest production technology fuses the decor and wearlayer to the coreboard. Attached high grade sound insulation pad - excellent reduction of up to 20 dB.

This new developed premium product offers the following specific properties.

- water resistant
- high durability
- low installation thickness
- easy maintanance
- reusable
- fully recyclable
- suitable for warm water underfloor heating

The authentic decors of the SolidCore® reflect a real wood appearance. This natural look becomes more expressive with a natural grained textured surface. Thanks to the patented locking system, the flooring can be installed fast, clean and easy.

Product composition

PU-sealing

wearlayer

rigid coreboard

patented click system

integrated sound insulation

SolidCORE® collection

COLLECTION

SolidCORE® LIVING 4,5 x 181 x 1.220 mm

COLLECTION

SolidCORE® X-TREME 5,5 x 181 x 1.220 mm

COLLECTION

SolidCORE® X-CLUSIVE 5,5 x 225 x 1.800 mm

COLLECTION

SolidCORE® BRICK-DESIGN 5,5 x 470 x 940 mm

COLLECTION

SolidCORE® LIVING

10 dekors | 4,5 x 181 x 1.220 mm

614 01 AGAVE

614 02 VERA

614 03 IRIS

614 04 JASMIN

614 05 NERINE

Also available as adhesive plank or with HDF backing!

NIGELLA 614 06

OKRA 614 07

PIMENT 614 08

SAFRAN 614 09

SANTINI 614 10

COLLECTION

SolidCORE® X - T R E M E

14 dekors | 5,5 x 181 x 1.220 mm

610 01 S5 OAK LOTUS

610 02 S5 OAK PETUNIA

610 03 S5 OAK CAMELA

610 04 S5 OAK LINEA

610 05 S5 OAK MALVE

610 06 S5 OAK GINGER

610 07 S5 OAK VIOLA

Also available as adhesive plank or with HDF backing!

OAK HASEL 610 08 S5

OAK YOLA 610 09 S5

OAK CALLA 610 10 S5

OAK STAHL 610 11 S5

OAK HERBA 610 12 S5

OAK ARNICA 610 17 S5

OAK ENZIAN 610 18 S5

COLLECTION

SolidCORE®
X - C L U S I V E

8 dekors | 5,5 x 225 x 1.800 mm

OAK MELIA

01

617

OAK MORUS

02

617

OAK TILIA

03

617

OAK FAGUS

04

617

617 05 OAK CASSIA

617 06 PINE DAPHNE

617 07 PINE OLEA

617 08 OAK PIERIS

COLLECTION

SolidCORE®
BRICK-DESIGN

8 dekors | 5,5 x 470 x 940 mm

CEMENT LIGHT 616 01

CONCRETE GREY 616 02

CONCRETE SAND 616 03

CONCRETE WHITE 616 04

SLATE STONE 616 05

CEMENT DARK GREY 616 06

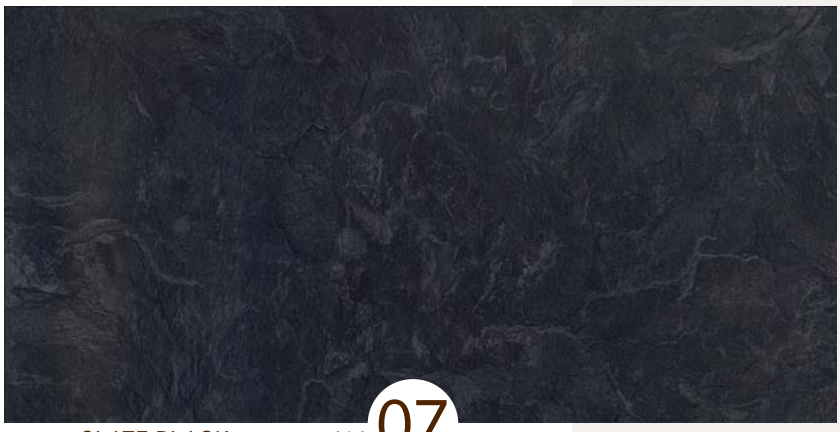

SLATE BLACK 616 07

CERAMIC STEEL 616 08

Technical data

SolidCORE® Living

Cover type according to MMFA:	Class 2
Plank format:	1.220 mm x 181 mm
Thickness of element:	4,5 mm
Wear layer:	0,3 mm
Utilisation class:	23/31
Weight:	6,99 kg/m²
Installation:	floating
Locking system:	L2C
Dimension stability:	0,01 %
Slip resistance level:	R9
Fire behaviour:	Bfl-S1
Footfall sound absorbtion:	20 dB
Thermal transmittance:	0,0789 (m²K)W
Thermal conductivity:	0,09 W/(mK)
Underfloor heating:	suitable for installation on warm water underfloor heating
Packaging units:	1 pack = 14 planks = 3,09 m² 1 pal. = 40 pack = 123,66 m²

SolidCORE® X-treme

Cover type according to MMFA:	Class 2
Plank format:	1.220 mm x 181 mm
Thickness of element:	5,5 mm
Wear layer:	0,5 mm
Utilisation class:	33/42
Weight:	7,80 kg/m²
Installation:	floating
Locking system:	DropDown System
Dimension stability:	0,01 %
Slip resistance level:	R9
Fire behaviour:	Bfl-S1
Footfall sound absorbtion:	20 dB
Thermal transmittance:	0,0789 (m²K)W
Thermal conductivity:	0,09 W/(mK)
Underfloor heating:	suitable for installation on warm water underfloor heating
Packaging units:	1 pack = 10 planks = 2,208 m² 1 pal. = 50 pack = 110,41 m²

SolidCORE® X-clusive

Cover type according to MMFA:	Class 2
Plank format:	1.800 mm x 225 mm
Thickness of element:	5,5 mm
Wear layer:	0,5 mm
Utilisation class:	33/42
Weight:	7,80 kg/m²
Installation:	floating
Locking system:	DropDown System
Dimension stability:	0,01 %
Slip resistance level:	R9
Fire behaviour:	Bfl-S1
Footfall sound absorbtion:	20 dB
Thermal transmittance:	0,0789 (m²K)W
Thermal conductivity:	0,09 W/(mK)
Underfloor heating:	suitable for installation on warm water underfloor heating
Packaging units:	1 pack = 6 planks = 2,43 m² 1 pal. = 39 pack = 94,77 m²

SolidCORE® Brick-Design

Cover type according to MMFA:	Class 2
Plank format:	940 mm x 470 mm
Thickness of element:	5,5 mm
Wear layer:	0,5 mm
Utilisation class:	33/42
Weight:	7,80 kg/m²
Installation:	floating
Locking system:	DropDown System
Dimension stability:	0,01 %
Slip resistance level:	R9
Fire behaviour:	Bfl-S1
Footfall sound absorbtion:	20 dB
Thermal transmittance:	0,0789 (m²K)W
Thermal conductivity:	0,09 W/(mK)
Underfloor heating:	suitable for installation on warm water underfloor heating
Packaging units:	1 pack = 5 planks = 2,209 m² 1 pal. = 45 pack = 99,405 m²

Laying technologies

The patented L2C and DropDown click systems convince with their simple angle mechanism, in which the planks are quickly, cleanly and easily inserted into each other.

Errors and technical modifications excepted.

BARTH & CO
MARKETERS SINCE 1873

F.W. Barth & Co. GmbH
Fuggerstraße 25 | DE - 41352 Korschenbroich
Phone +49 2161 995599 | info@barth1873.de
www.barth1873.de